

SPRINT™ HOLDFAST

ELECTRIC STRIKES SI125SLD DUAL-MODE SERIES


● SPECIFICATIONS AND TECHNICAL DETAILS

- DIMENSIONS : 124mmLx42.5mmWx41mmD
- VOLTAGE : 12VDC
- MODES : CAN BE CHANGED TO EITHER FAIL-SAFE OR FAIL-SACURE
- CURRENT : 230mA / 12VDC
- OPTIONS : WITH LOCK AND DOOR STATUS SENSOR
- CE APPROVED




■ INSTALLATION

Door status monitoring : Orange=NC, Grey=COM, Green=NO
 Lock status monitoring : Blue=NO, White=COM, Yellow=NC

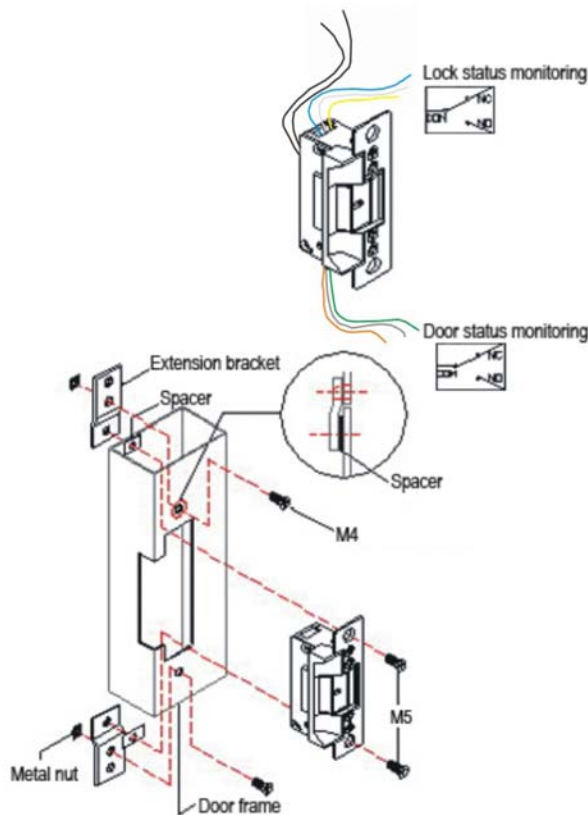


■ APPLICATIONS

APPLICATION REQUIREMENT :
 SUITABLE FOR DOOR THICKNESS : 40mm-50mm

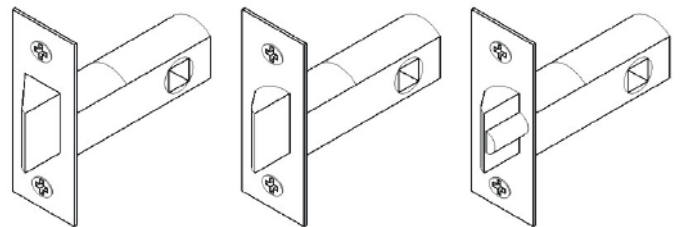

LATCH TYPE

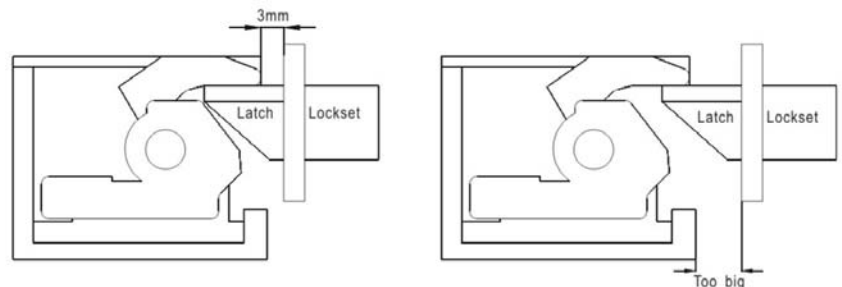

ALLOWABLE LATCH CAVITY

SPRINT RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

