

# SPRINT™ HOLDFAST

## ELECTRIC STRIKES

### SI-302

#### SPECIFICATIONS AND TECHNICAL DETAILS

Dimensions: 175mmLx44mmWx27mmD

Voltage: 12v / 24v DC

Operating current (Fail secure): 300mA

Modes: Fail secure/ Fail safe


Monitor: Door and lock

Face plate: stainless steel

Fire resistant



#### ■ INSTALLATION

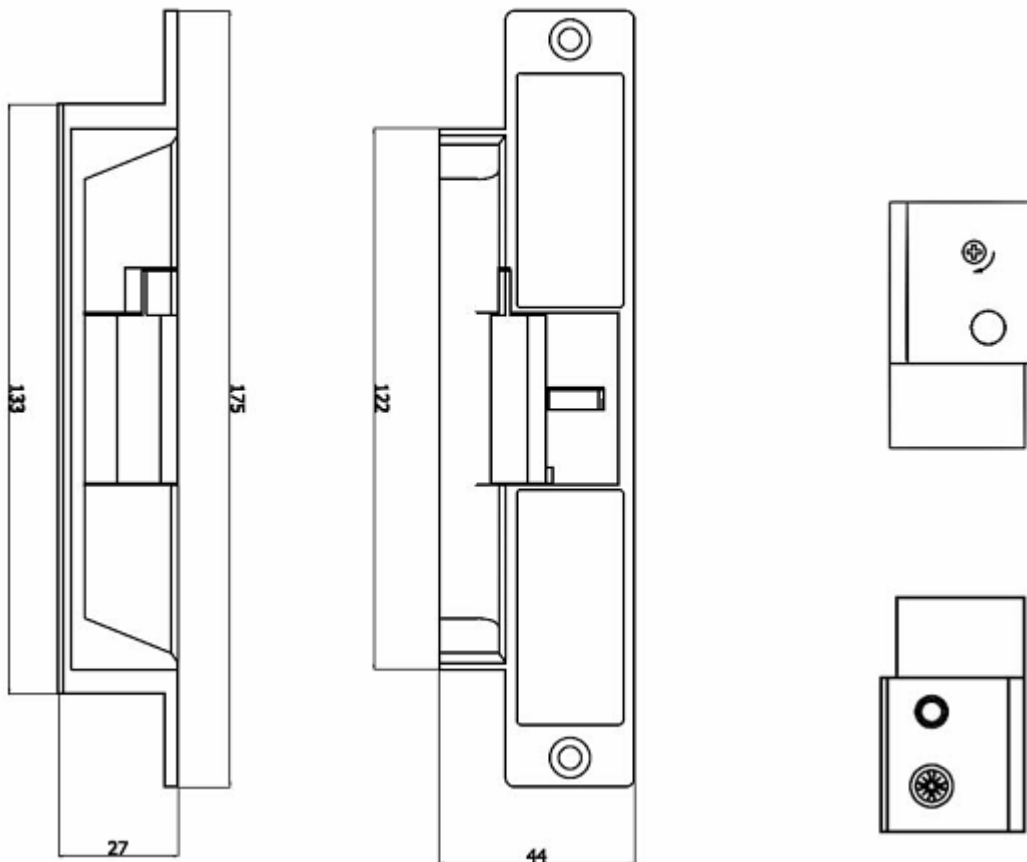

SPRINT RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

